

**IZOLATOARE DE TRECERE 1kV / 1250A, 2000 A, 3150 A, 4500 A, 5000 A
TRANSFORMER BUSHINGS FOR 1kV / 1250A, 2000 A, 3150 A, 4500 A, 5000 A**

EN50386

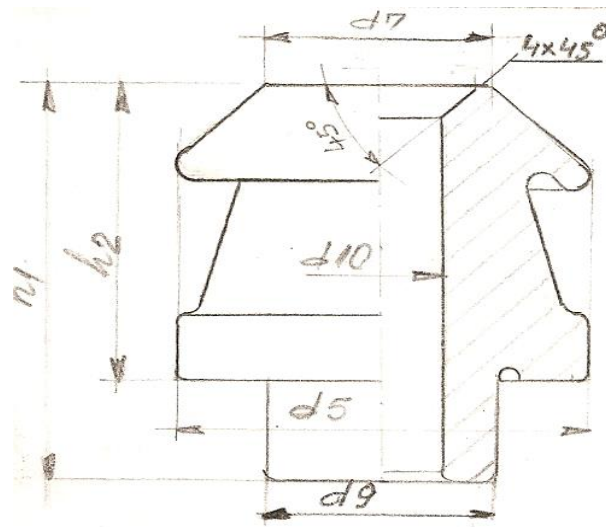


Fig. 1

**DIMENSIUNI
DIMENSIONS**

Izolator superior Upper insulator			1/2000 A	1/4500 A	1/5000 A	1/3150 A	1/1250 A
Code			F114-245	F114-242	F114-240	F114-254	F114-256
Figura Figure			1	1	1	1	1
Inaltime, max Height, max	h ₁	mm	90	117	117	92	86
Diametrul maxim Maximal diameter	d ₅	mm	104	160	160	125	90
Diametrul fetei superioare Diameter of the top face	d ₇	mm	80	115	115	97	60
Diametrul gaurii, min Hole diameter, min	d ₁₀	mm	44	57	66	50	32
Inaltimea partii exterioare a izolatorului, min External height of the insulator, min	h ₂	mm	60	72	72	60	60
Diametrul zonei imersate, max Shank diameter, max	d ₉	mm	68	117	117	87	54
Masa Weight		kg	0,807	2,730	3,000	1,420	0,575

GROSS TOLERANCES: ACORDING TO DIN 40680