

**IZOLATOARE DE TRECERE 1kV / 250A, 630A,
TRANSFORMER BUSHINGS FOR 1kV / 250A, 630A
EN50386**

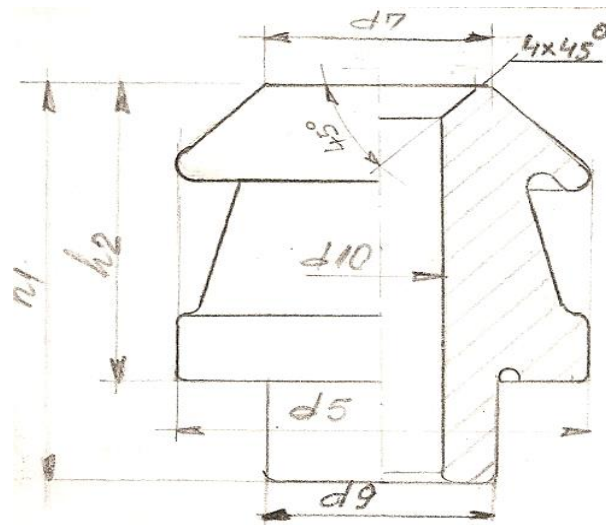


Fig. 1

**DIMENSIUNI
DIMENSIONS**

Izolator superior Upper insulator			1 / 250 A	1 / 250 A	1 / 630 A	1/250 A	1/630 A
Code			F114-217	F114-184	F114-216	F114-243	F114-244
Figura Figure			1	1	1	1	1
Inaltime, max Height, max	h₁	mm	70	108	85	68	76
Diametrul maxim Maximal diameter	d₅	mm	55	70	70	52	70
Diametrul fetei superioare Diameter of the top face	d₇	mm	30	30	40	32	46
Diametrul gaurii, min Hole diameter,min	d₁₀	mm	14	14	22	14	22
Inaltimea partii exterioare a izolatorului,min External height of the insulator, min	h₂	mm	45	91	60	48	60
Diametrul zonei imersate, max Shank diameter, max	d₉	mm	27	27	43	27	43
Masa Weight		kg	0,178	0,300	0,398	0,172	0,368

GROSS TOLERANCES: ACORDING TO DIN 40680