

SUPTURI IZOLANTE DE EXTERIOR 24 kV, CLASA A

24 kV OUTDOOR POST INSULATOR, CLASS A

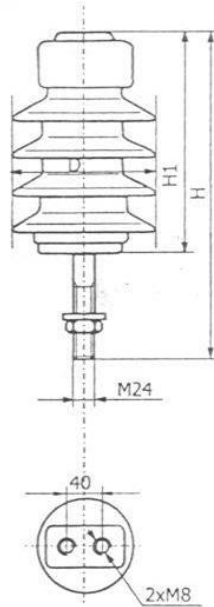


Fig.1

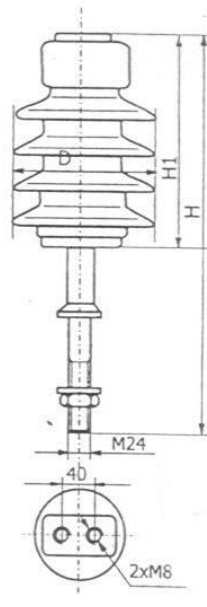


Fig.4

**DIMENSIUNI SI CARACTERISTICI
DIMENSIONS AND CHARACTERISTICS**

Tip / Tipe		24 – PA - 125	
Cod / Code		F 113 – 013.2	F 113 – 013.1
Figura / Figure		4	1
H	mm	495	405
H ₁	mm	375	308
D	Mm	200	200
Linia de fuga Creepage distance	mm	610	610
Tensiunea de tinere la ITT Lightning impulse withstand voltage	kV _{max}	125	125
Tensiunea de tinere la frecventa ind. sub ploaie Power frequency withstand voltage, wet	kV _{min}	50	50
Rezistanta mecanica Mechanical load	kN	3,75	3,75
Masa / Weight	kg	11,2	11