


**IZOLATOARE DE TRECERE 52 kV / 1000 - 3150 A PENTRU TRANSFORMATOARE
METALIZAT
OUTDOOR TYPE TRANSFORMER BUSHINGS FOR 52 kV / 1000 - 3150 A METALLIZED
DIN 42534**

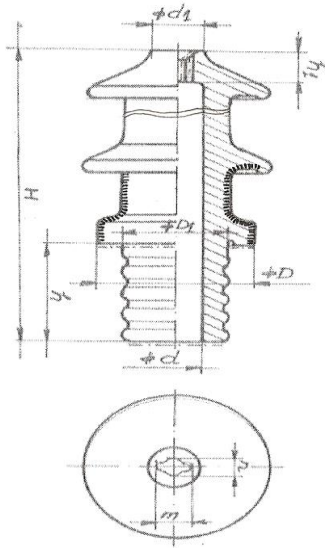

**DIMENSIUNI
DIMENSIONS**

			52 Nf 1000 –3150 A		
Code			F 113 - 081		
Numar de aripi Number of sheds			6		
Inaltime Height	H	mm	685		
Diametrul gaurii Hole diameter	d	mm	74		
Diametrul gaurii la capatul superior Top end hole diameter	n	mm	51		
Diametrul flansei Flange diameter	D	mm	183		
Diametrul zonei imersate Shank diameter	D₁	mm	131		
Lungimea zonei imersate Shank length	h	mm	180		
Lungimea gaurii profilate Top end hole length	h₁	mm	40		
Diametrul fetei superioare Top face diameter	d₁	mm	100		
Distanta intre extremitatile canalelor gaurii profilate Distance between the extremitis of The grooves of the top end hole	m	mm	62		
Linia de fuga Creepage distance		mm	1090		
Masa Weight		kg	26,00		

GROSS TOLERANCES: ACORDING TO DIN 40680

**CARACTERISTICI
CHARACTERISTICS**

		52 Nf 1000 –3150 A		
Cod Code		F113-081		
Tensiunea de tinere ITT Lightning impulse withstand voltage	kV_{max}	250		
Tensiunea de tinere la frecventa industriala sub ploaie Power frequency withstand voltage, wet	kV_{ef}	95		